


PRE-OILER AND BACKUP OIL PUMP CONNECTION DIAGRAM

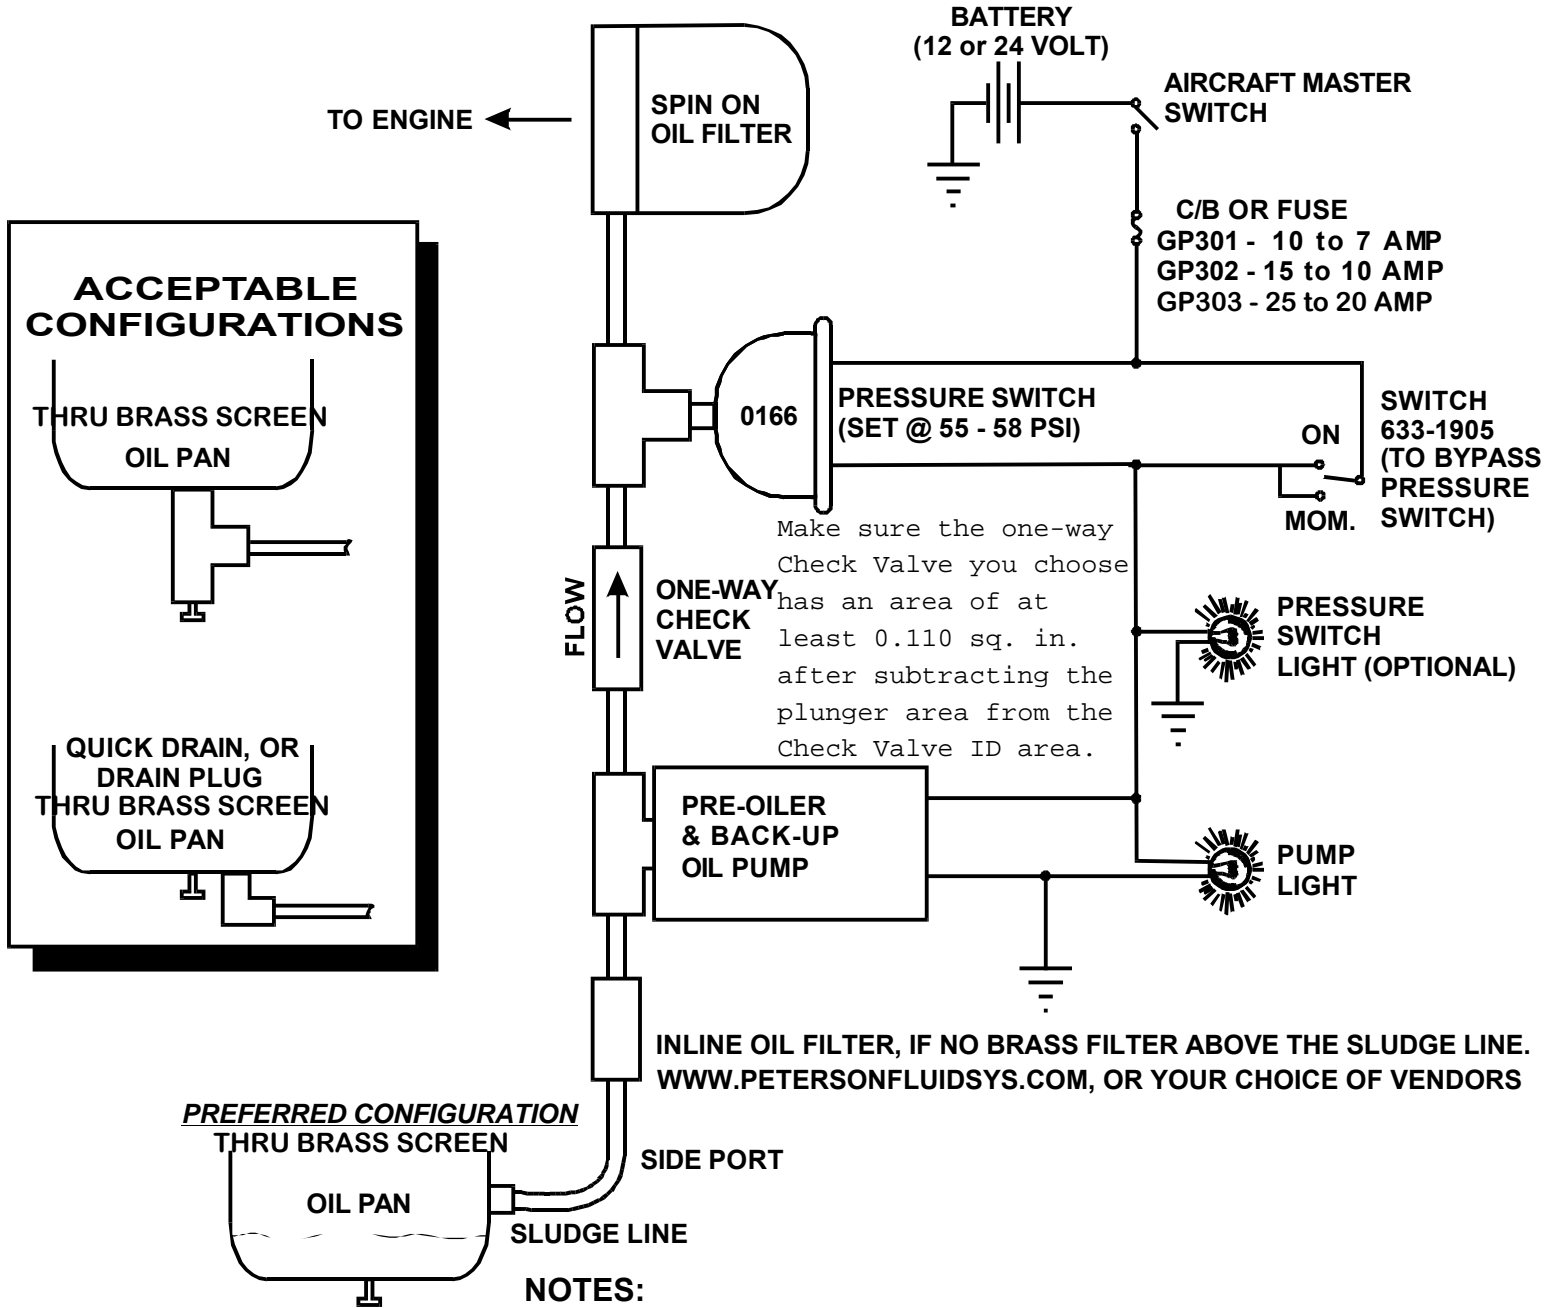

NOTES:

1. USE 1/2" I.D. LINES, HOSES AND FITTINGS PREFERRED. 3/8" I.D. IS ACCEPTABLE FOR VERY SHORT DISTANCES
2. ONE-WAY 1/2" I.D. CHECK VALVE and filters MAY BE OBTAINED FROM: WWW.STRATAFLO.COM, www.SummitRacing.com, WWW.EPRESSHOSEANDFITTINGS.COM, WWW.KEPNER.COM, NAPA, OR YOUR CHOICE OF VENDORS.
3. USE A BRASS SCREEN FILTER IN THE OIL PAN PRIOR TO THE PREOILER, OR A PRE-FILTER.
4. WHILE YOU CAN MOUNT THE PUMP HORIZONTALLY, VERTICALLY WITH THE PUMP *DOWN* IS THE PREFERRED WAY.